



EXTRUDED ALUMINUM LOUVER

MODEL: 2-SRF

STORM RESISTANT CHANNEL


FRAME LOUVER

Miami Dade County Approved-NOA No. 14-1117.06

INSTALLATION INSTRUCTION

APPLICATION

The 2-SRF Louver with Flange Frame is a Miami-Dade Qualified and Florida Product Approved. It must be installed in accordance with the installation instruction shown below. 2-SRF is structurally calculated to withstand positive and negative wind-loads up to ± 75 PSF.

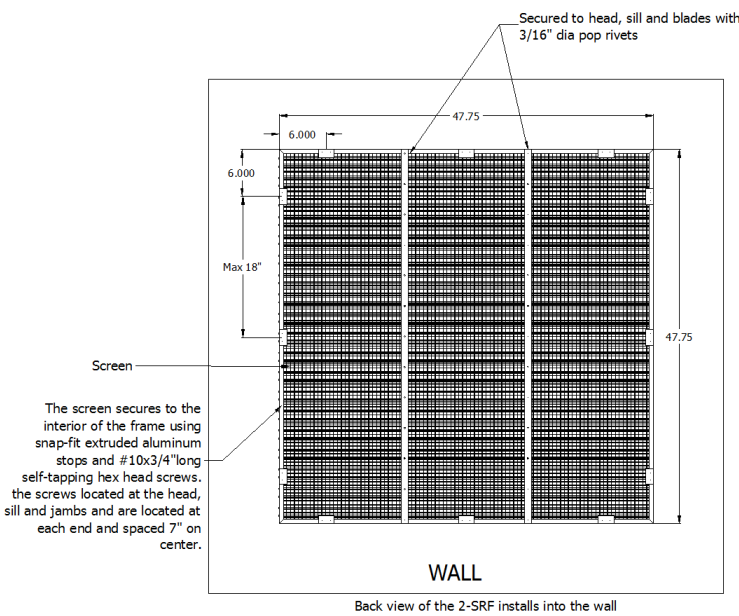

FASTENER QUANTITIES

MAX INSIDE DIMENSION L x W	NO. FASTENERS - SUBSTRATE TYPE		
	WOOD	CONC.	STEEL
18"x18"	8	8	8
24"x24"	8	8	8
30"x30"	12	12	12
36"x36"	12	12	12
42"x42"	12	12	12
48"x48"	12	12	12

FASTENER SPACING: 6" FROM CORNERS
MAX 18" O.C.

