




FIRE DAMPER

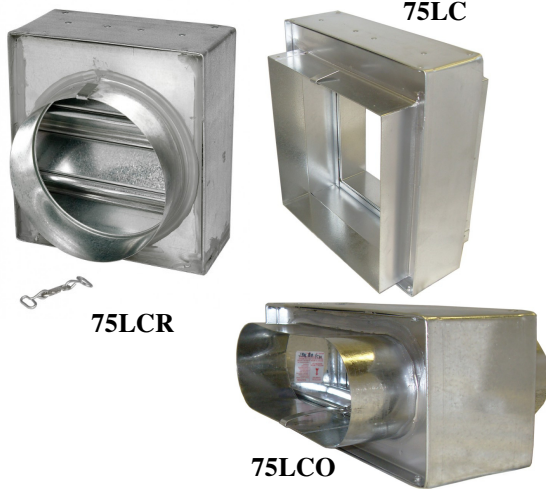

MODEL:
75LC (3 HR rating)
75LCR (3 HR rating)
75LCO (3 HR rating)

APPLICATION

The model 75LC/75LCR/75LCO are fire damper with blades and frames "Out of Air Stream". It is approved for use in walls and partitions with fire resistance ratings less than 3 hours. This model carries a 3 hour UL fire damper label.

RATING:

UL CLASSIFIED: UL 555 Fire Resistance Rating
Fire resistance rated 3 Hours
Partitions materials rated 4 Hours or less

Standard Construction

Frame: 22 Ga. galvanized steel
Blade: 22 Ga. galvanized steel
Closure Spring: Stainless steel
Fusible Link: 165°F
Mounting: Vertical

Model 75LC/75LCR/75LCO meets the requirements for fire dampers established by:
**CSFM California State Fire Marshal
Fire Damper Listing (#3225-1417:102)**





Optional Material:

Type 316 stainless steel

| | Single Section | | | |
|------------|-----------------------|-------------------------|------------------|------------------|
| | Maximum Section (WxH) | Maximum Duct Size (WxH) | Minimum Diameter | Maximum Diameter |
| Vertical | 60"x60" | 120"x120" | 3" | 20" |
| Horizontal | NA | NA | NA | NA |

Model: 75LC
75LCR
75LCO

(Vertical Mount)

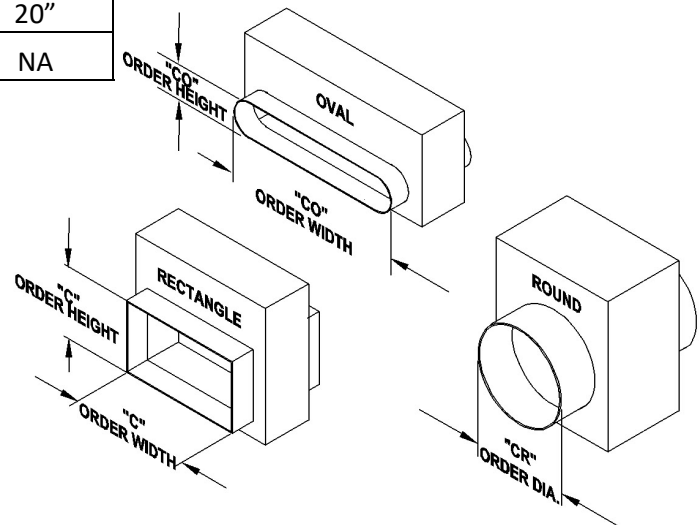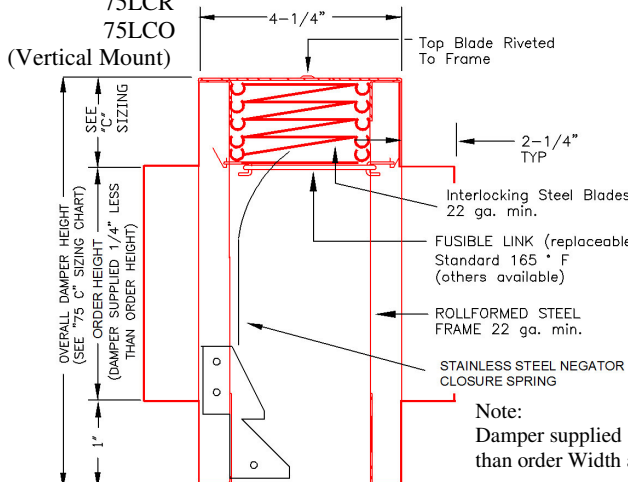

231 Commerce Dr. Montgomeryville, PA 18936
Tel: 215-412-4445 Fax: 215-412-4409
Email: lloydind@firedamper.com

138 Industrial Loop West, Orange Park, FL 32073
Tel: 904-541-1655 Fax: 904-541-1657
Email: lloydind1@firedamper.com

B1, 4/F., Luen Ming Hing Factory Building
36 Mok Cheong St.,
To Kwa Wan, Kowloon, H. K.
Tel: 852-2760-4188 Fax: 852-2760-4177
Email: tatanlexyim@lloydasia.com

