





SLEEVES MODEL 75 CURTAIN FIRE DAMPERS


MODEL:
75A STANDARD
75AF FLANGED STANDARD
75B STANDARD
75B-1 MINIMUM DUCTING

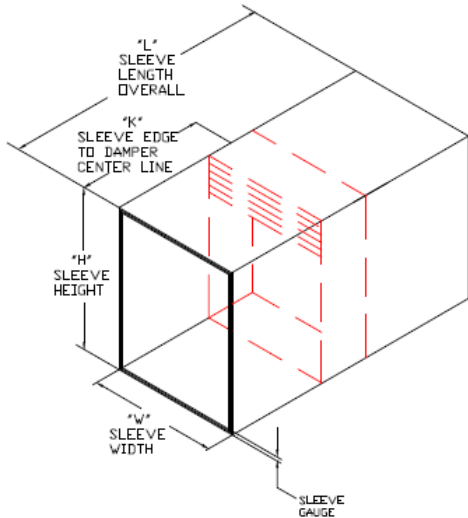

Type "A"
STANDARD 75A
SLEEVE

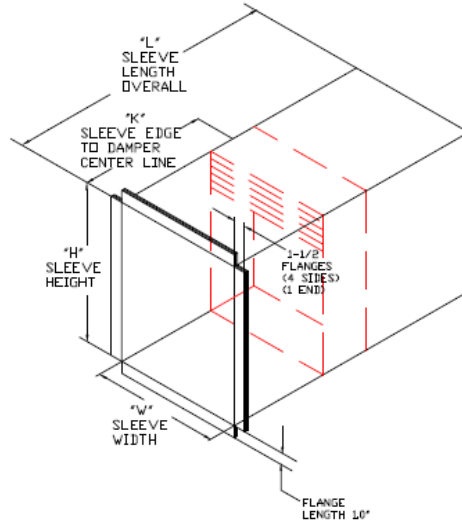


Type "AF"
FLANGED STANDARD
75A SLEEVE

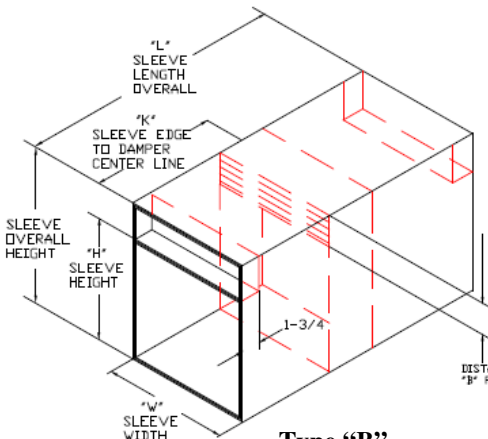

Type "B"
STANDARD
75B SLEEVE

DISTANCE IS BASED ON "B" PAN SIZING CHART.

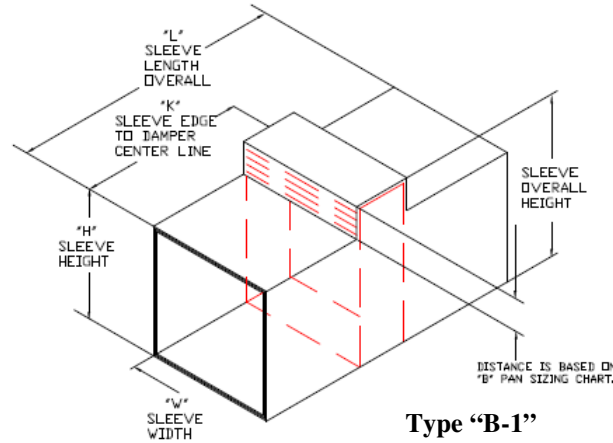

Type "B-1"
MINIMUM DUCTING
75B SLEEVE

DISTANCE IS BASED ON "B" PAN SIZING CHART.

- * When ordering specify:
 Rectangle x Width x Height x Length x Gauge + "K" dimension
 When not specified, dampers will be provided centered in sleeve length. (L/2)

SLEEVE DIMENSIONAL INFORMATION FOR CURTAIN FIRE DAMPERS AND DOORS

- Dampers and sleeves are always priced and ordered by W x H or dimensions as shown above. The type C, CR, and CO require the damper to be oversized. Actual overall dimensions can be determined by adding sleeve material thickness to the basic damper dimensions (after allowing for the standard 1/4" damper under sizing).
- "K" distance may be ordered at any dimension up to the sleeve length less one half the damper frame width. If "K" dimension is not specified, "K" dimension will be provided as sleeve length, L/2 (damper on centerline).

