



**FIRE DAMPER**

**MODEL:**  
**75AH & 75AV (1-1/2 HR rating)**



Model 75AV

**APPLICATION**

The model 75AH and 75AV fire damper. It is approved for use in walls, floors, and partitions with fire resistance ratings less than 2 hours. This model carries a 1-1/2 hour UL fire damper label.

**RATING:**

**UL CLASSIFIED:** UL 555 Fire Resistance Rating  
Fire resistance rated 1-1/2 Hours  
Partitions materials rated 2 Hours or less

**Standard Construction**


- Frame: 22 Ga. galvanized steel
- Blade: 22 Ga. galvanized steel
- Closure Spring: Negator stainless steel
- Fusible Link: 165°F (Standard)
- Mounting: Horizontal or vertical

**Optional Material:**


- Type 316 stainless steel
- 212°F Fusible Link

Model 75A meets the requirements for fire dampers established by:

**CSFM California State Fire Marshal  
Fire Damper Listing (#3225-1417:102)  
British Standard (BS – 476 Part 20)**

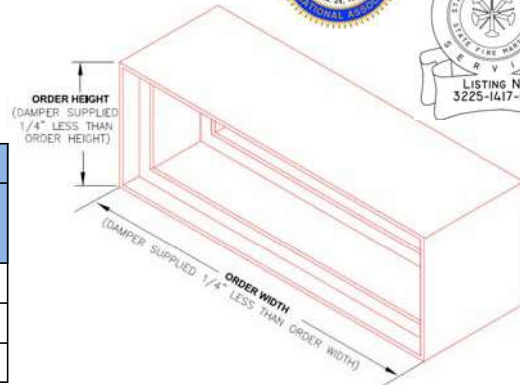

	Single Section		Multiple Section
	Minimum Size (WxH)	Maximum Size (WxH)	Maximum Size (WxH)
Vertical	4"x4"	60"x60"	120"x120"
Horizontal	4"x4"	60"x60"	N/A
Horizontal	4"x4"	34"x48"	68"x96"

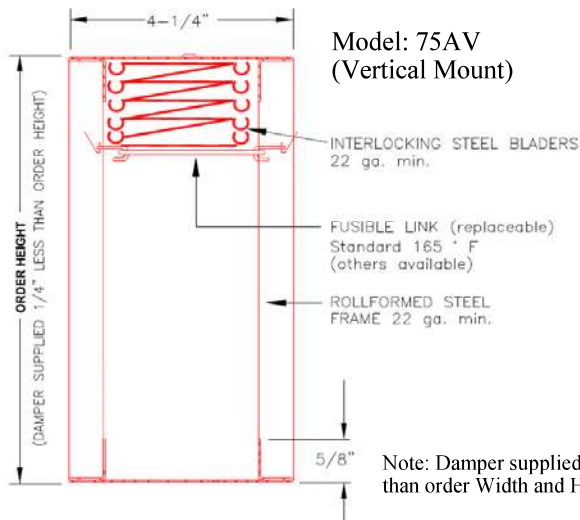

Note: Damper supplied 1/4" less than order Width and Height

