



# DYNAMIC FIRE DAMPER



**MODEL:**  
**75DV-DY (1-1/2 HR rating)**  
**75DH-DY (1-1/2 HR rating)**

### APPLICATION

The model 75D-DY is a thin line damper, constructed with galvanized steel. 75D-DY is 1-1/2 hour UL rated dynamic damper for use in HVAC systems that remain in operation during a fire. The unit can be installed vertically in walls or horizontally in floors .

### RATING: UL CLASSIFIED:

UL 555 Fire Resistance Rating  
Fire resistance rated 1-1/2 Hours  
Building materials rated in 2 hours fire partition



### Standard Construction

- Frame: 22 Ga. galvanized steel
- Blade: 22 Ga. galvanized steel
- Closure Spring: Stainless steel
- Fusible Link: 165°F (Standard)
- Mounting: Horizontal or vertical


### Optional Material:

- Type 316 stainless steel
- 212°F Fusible Link
- Dynamic Fire Dampers:
- Bi-directional
- 2400 FPM maximum velocity
- 4.0 WG maximum static pressure

Features horizontal closure spring operation under airflow in HVAC systems where fans remain running in Fire and smoke control. Dynamic fire dampers bear a label attesting to airflow and maximum static pressure limits.

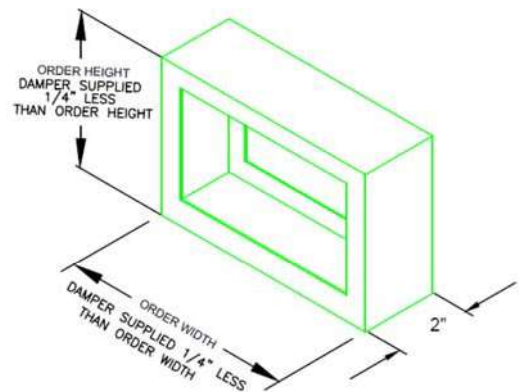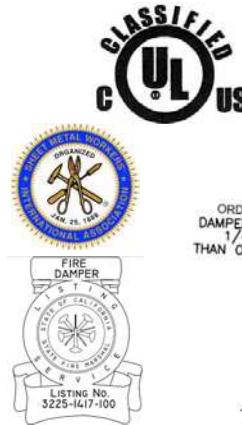

HORIZONTAL MOUNT

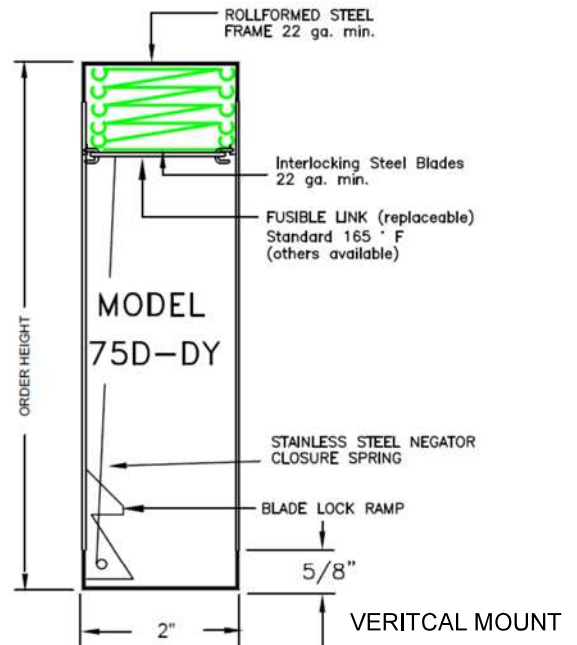

	Single Section		Multiple Section
	Minimum Size (WxH)	Maximum Size (WxH)	Maximum Size (WxH)
Vertical	4"x4"	24"x24"	Consult factory for availability
Horizontal	4"x4"	24"x24"	Consult factory for availability

231 Commerce Dr. Montgomeryville, PA 18936  
Tel: 215-412-4445 Fax: 215-412-4409  
Email: lloydind@firedamper.com

138 Industrial Loop West, Orange Park, FL 32073  
Tel: 904-541-1655 Fax: 904-541-1657  
Email: lloydind1@firedamper.com

B1, 4/F., Luen Ming Hing Factory Building  
36 Mok Cheong St.,  
To Kwa Wan, Kowloon, H. K.  
Tel: 852-2760-4188 Fax: 852-2760-4177  
Email: tatanlexyim@lloydasia.com

