



FIRE DAMPER

MODEL:
75LBV (3 HR rating)



APPLICATION

The model 75LB is a fire damper with blades out of the airstream. This model carries a 3 hour UL fire damper label. It is approved for use in walls and partitions with fire resistance ratings less than 4 hours.

RATING:

UL CLASSIFIED:

UL 555 Fire Resistance Rating
Fire resistance rated 3 Hours
Partitions materials rated 4 Hours or less

Standard Construction

- Frame: 22 Ga. galvanized steel
- Blade: 22 Ga. galvanized steel
- Closure Spring: Stainless steel
- Fusible Link: 165°F (Standard)
- Mounting: Vertical

Optional Material:


- Type 316 stainless steel
- 212°F Fusible Link

Model 75LB meets the requirements for fire dampers established by:


**CSFM California State Fire Marshal
Fire Damper Listing (#3225-1417:102)**



	Single Section		Multiple Section
	Minimum Size (WxH)	Maximum Size (WxH)	Maximum Size (WxH)
Vertical	4"x3"	60"x53"	120"x53"
Horizontal	NA	NA	NA

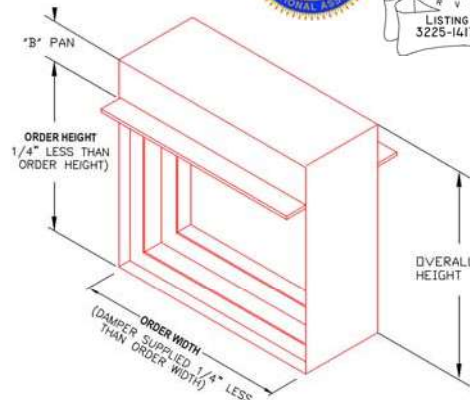

Model: 75LV
(Vertical Mount)

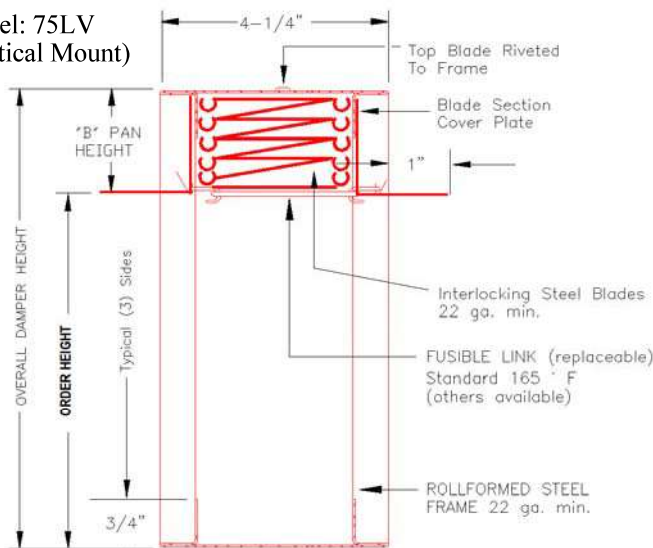

Note:
*Please see "B" PAN Sizing Chart for the "B" PAN Height.

Damper supplied 1/4" less than order Width and Height.

