



# FIRE DAMPER



**MODEL:**  
**75NBV (3 HR rating)**

### APPLICATION

The model 75NB is a thin line fire damper with blades out of the airstream. This model carries a 3 hour UL fire damper label. It is approved for use in walls and partitions with fire resistance ratings less than 4 hours.

### RATING:

**UL CLASSIFIED:** UL 555 Fire Resistance Rating  
Fire resistance rated 3 Hours  
Partitions materials rated 4 Hours or less

### Standard Construction

- Frame: 22 Ga. galvanized steel
- Blade: 22 Ga. galvanized steel
- Closure Spring: Stainless steel
- Fusible Link: 165°F (Standard)
- Mounting: Vertical

### Optional Material:

- Type 316 stainless steel
- 212°F Fusible Link



Model 75NB meets the requirements for fire dampers established by:

**CSFM California State Fire Marshal  
Fire Damper Listing (#3225-1417:102)**



	Single Section		
	Minimum (WxH)	Maximum Section (WxH)	Maximum Duct Size (WxH)
Vertical	4" x 3"	48" x 41"	96" x 98"
Horizontal	NA	NA	NA

Model: 75NB  
(Vertical Mount)

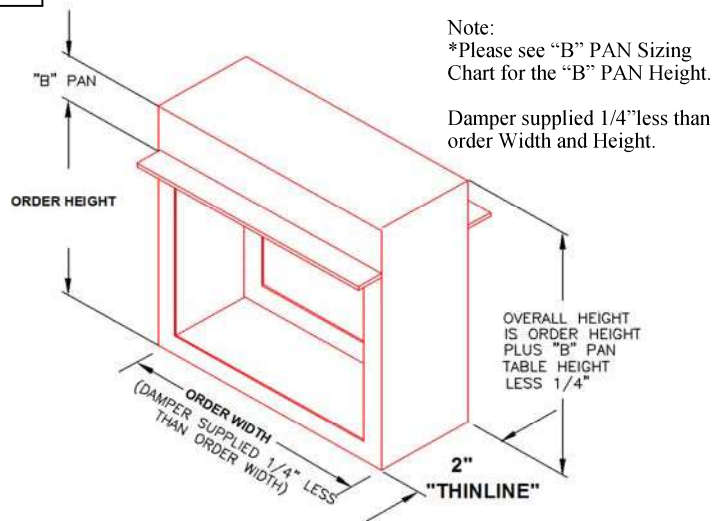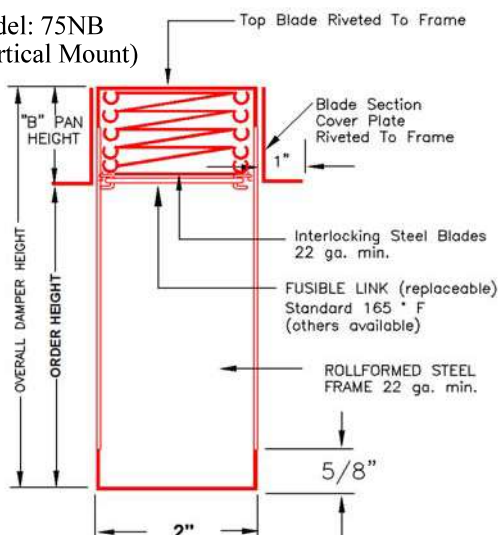

231 Commerce Dr. Montgomeryville, PA 18936  
Tel: 215-412-4445 Fax: 215-412-4409  
Email: lloydind@firedamper.com

138 Industrial Loop West, Orange Park, FL 32073  
Tel: 904-541-1655 Fax: 904-541-1657  
Email: lloydind1@firedamper.com

B1, 4/F., Luen Ming Hing Factory Building  
36 Mok Cheong St.,  
To Kwa Wan, Kowloon, H. K.  
Tel: 852-2760-4188 Fax: 852-2760-4177  
Email: tatanlexyim@lloydasia.com

